

1000 Watt 90° Coaxial Hybrid Coupler

Data Sheet



100-500 MHz
HYBR-LINE™




Model: PH90-100-500-1KN 

Frequency:	100 - 500 MHz
Amplitude Balance:	±0.8 dB Max.
Power:	1000 Watts CW
Phase Balance:	± 3° Typical
Insertion Loss:	0.50 dB Max.
Isolation:	20 dB Min.
VSWR:	1.35:1 Max. All Ports
Connectors:	"N" Female All Ports

PH90 Series Hybrid couplers provide High Power dividing or combining while exhibiting excellent phase and amplitude balance over continuous broadband operation. Solid compact designs are able to operate in a wide variety of environments, which include Medical, Industrial, Commercial wireless, Military, and Space. The **P3** library of designs allows for modifications of standard designs to be made quickly and inexpensively to meet specific requirements with short delivery times. Please consult the factory for any special requirements or frequency.

NOTES:

Material: Aluminum Alloy. 6061-T651
Finish: Chem-Film, MIL-DTL-5541F
Operating Temperature: -55°C to +85°C
Other connector configurations available

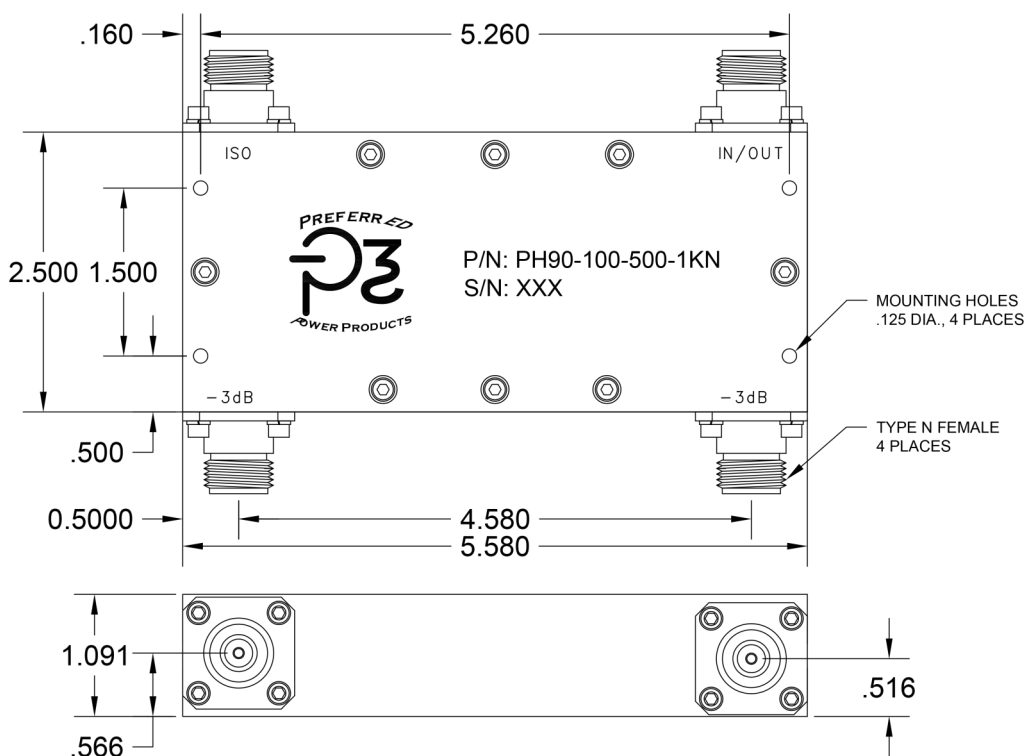

Specifications subject to change without notice

www.preferredpowerproducts.net

Tel: 1-772-485-9786 | sales@preferredpowerproducts.net

Palm City, FL 34990

1000 Watt 90° Coaxial Hybrid Coupler


Data Sheet




100-500 MHz




VSWR ALL PORTS

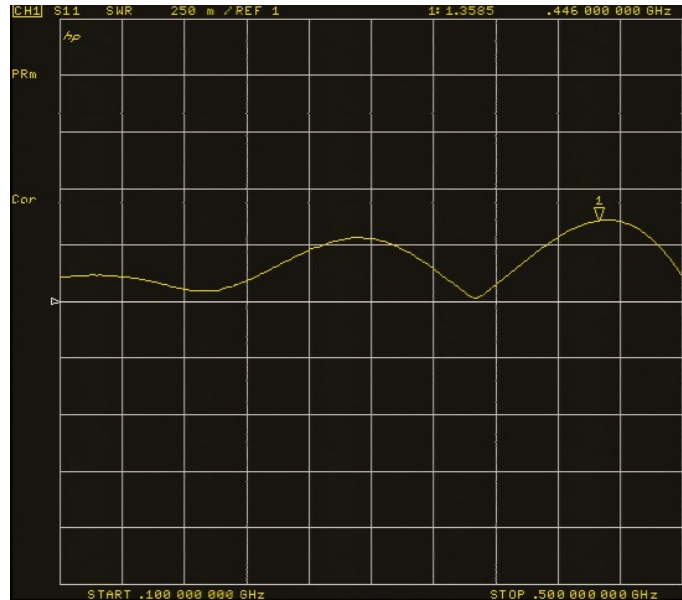

COUPLING/AMPLITUDE BALANCE

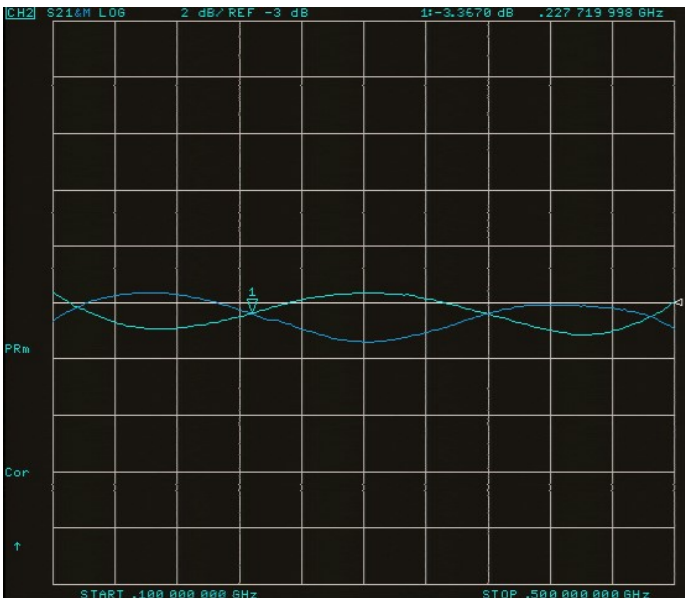

PHASE BALANCE

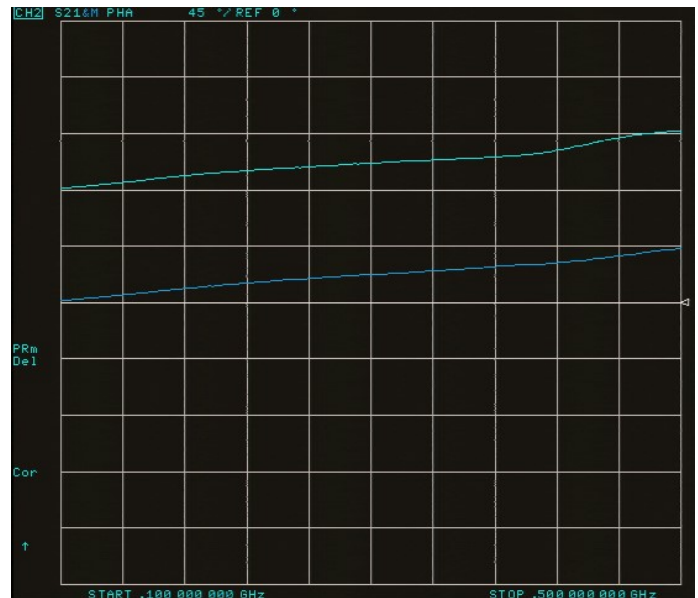

www.preferredpowerproducts.com

Tel: 1-772-291-2549 | sales@preferredpowerproducts.net

STUART, FL 34997