


2000 Watt 40 dB Dual Directional Coupler

Data Sheet



Model: PCD-20-100-2KSCN40

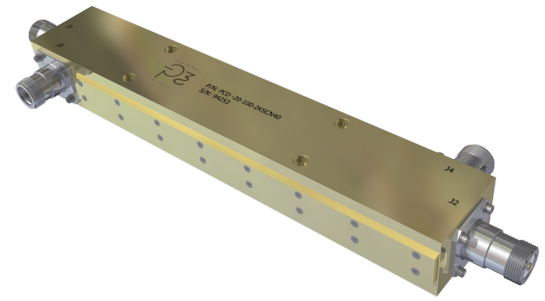

| | |
|-----------------|---------------------------|
| Frequency: | 20 - 100 MHz |
| Coupling: | 40 dB ±1.0 dB Max.* |
| Power: | 2000 Watts CW |
| Freq. Flatness: | ±0.75 dB Max. |
| Insertion Loss: | 0.20 dB Max. |
| Directivity: | 24 dB Min. |
| VSWR: | 1.5:1 Max. Primary Line** |
| Connectors: | "SC" Female In/Out |
| | "N" Female Coupled Ports |


PCD Series couplers feature reliable Stripline construction using multi-section designs which provides power sampling up to 2000 watts CW in small coaxial packages that have proven power performance and reliability under extreme environmental conditions. To enhance performance, matched high power terminations are internally mounted to obtain high directivity, higher coupled port power and excellent VSWR.

NOTES:

Material: Aluminum Alloy, 6061-T651
 Finish: Chem-Film, Gold Irridite MIL-C5541E
 Operating Temperature: -55°C to +85°C
 Uni-Directional version available
 Other connectors configurations available

* Theoretical Coupling Loss Not Included

** Coupled Ports are matched into 50Ω System

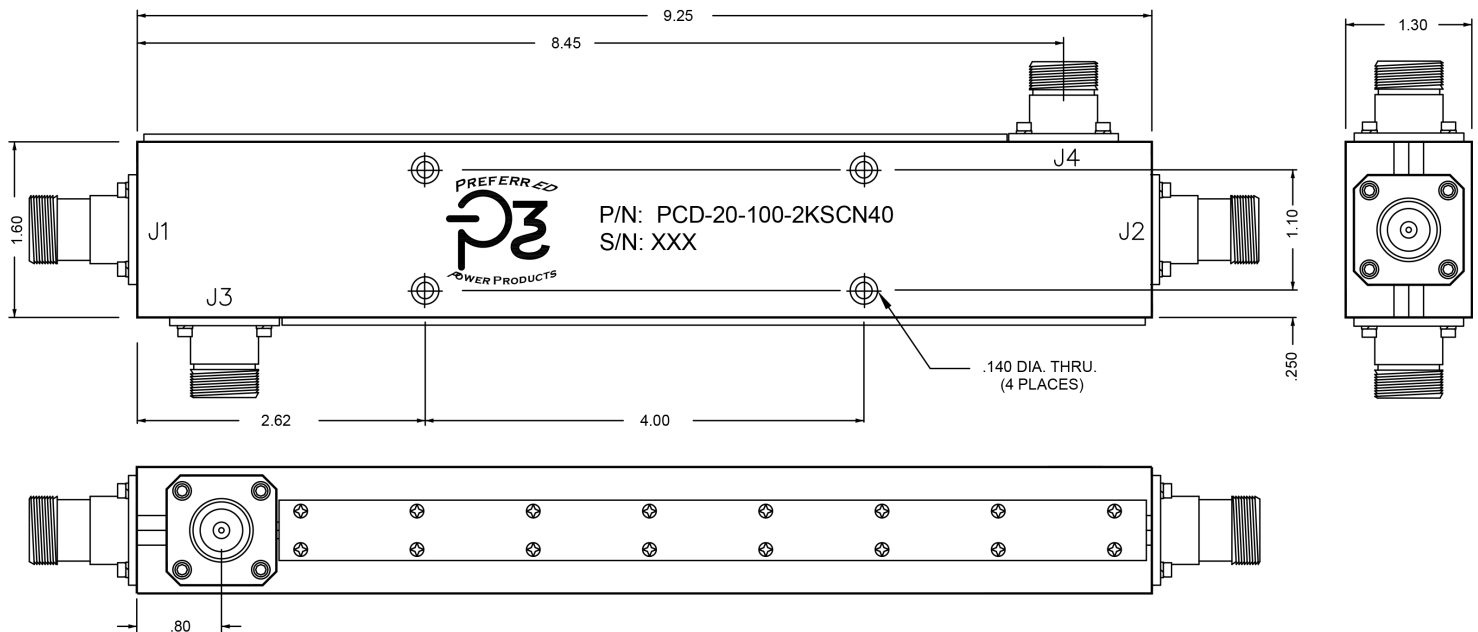

Specifications subject to change without notice

www.preferredpowerproducts.com

Tel: 1-772-291-2549 | sales@preferredpowerproducts.net

STUART, FL 34997