


1000 Watt 40 dB Dual Directional Coupler

Data Sheet



400-1000 MHz
PWR-LINE™

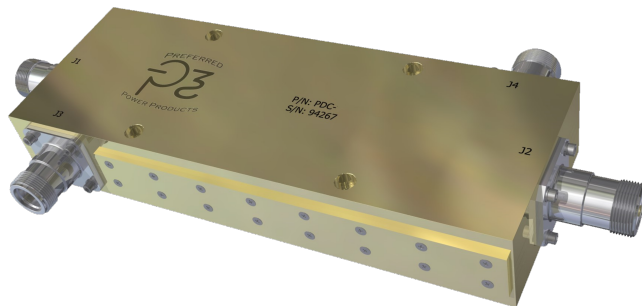

Model: PCD-400-1000-1KN40




Frequency:	400 - 1000 MHz
Coupling:	40 dB ±1.0 dB Max.*
Power:	1000 Watts CW
Freq. Flatness:	±0.25 dB Max.
Insertion Loss:	0.20 dB Max.
Directivity:	25 dB Min.
VSWR:	1.25:1 Max. All Ports
Connectors:	"N" Female All Ports

PNC Series couplers feature reliable Stripline construction using multi-section designs which provides power sampling up to 2000 watts CW in small coaxial packages that have proven power performance and reliability under extreme environmental conditions. To enhance performance, matched high power terminations are internally mounted to obtain high directivity, higher coupled port power and excellent VSWR.

NOTES:

Material: Aluminum Alloy, 6061-T651
 Finish: Chem-Film, Gold Iridite MIL-C5541E
 Operating Temperature: -55°C to +85°C
 Uni-Directional version available
 Other connectors configurations available

* Theoretical Coupling Loss Not Included

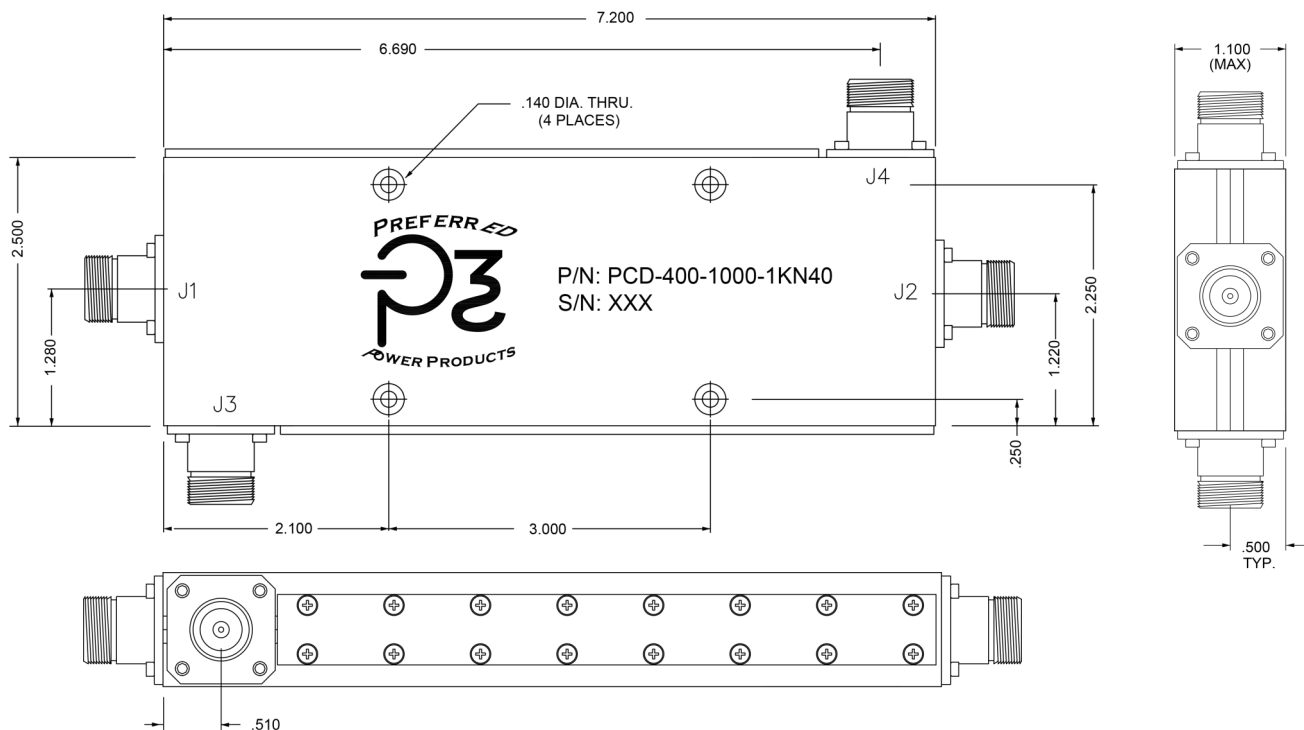

Specifications subject to change without notice

www.preferredpowerproducts.com

Tel: 1-772-291-2549 | sales@preferredpowerproducts.net

STUART, FL 34997