


1000 Watt 60 dB Dual Directional Coupler

Data Sheet



50-150 MHz
PWR-LINE™

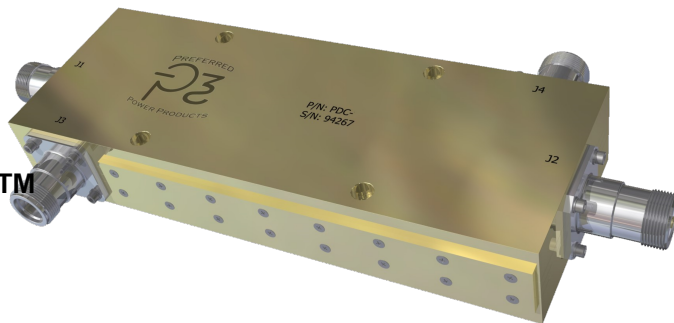

Model: PCD-50-150-1KN60




Frequency:	50 - 150 MHz
Coupling:	60 dB ±1.0 dB Max.*
Power:	1000 Watts CW
Freq. Flatness:	±0.60 dB Max.
Insertion Loss:	0.20 dB Max.
Directivity:	24 dB Min.
VSWR:	1.25:1 Max. All Ports
Connectors:	"N" Female All Ports

* Theoretical Coupling Loss Not Included

PNC Series couplers feature reliable Stripline construction using multi-section designs which provides power sampling up to 2000 watts CW in small coaxial packages that have proven power performance and reliability under extreme environmental conditions. To enhance performance, matched high power terminations are internally mounted to obtain high directivity, higher coupled port power and excellent VSWR.

NOTES:

Material: Aluminum Alloy, 6061-T651
 Finish: Chem-Film, Gold Iridite MIL-C5541E
 Operating Temperature: -55°C to +85°C
 Uni-Directional version available
 Other connectors configurations available

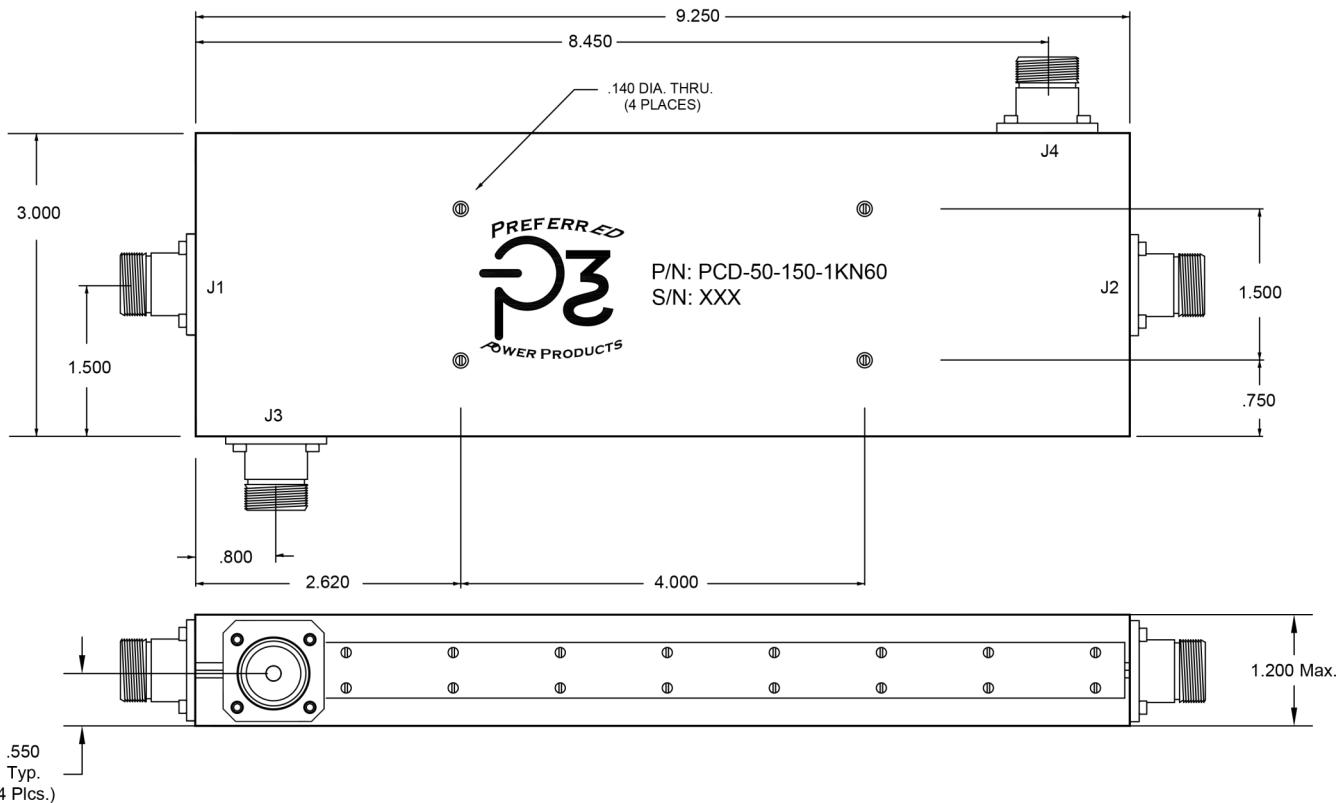

Specifications subject to change without

www.preferredpowerproducts.com
 Tel: 1-772-291-2549 | sales@preferredpowerproducts.net
 STUART, FL 34997