

250 Watt 90° *HYBR-LINE* Coupler



400-1000 MHz

Model: HBL-400-1000-R25H



Frequency:	400 - 1000 MHz
Amplitude Balance:	±0.60 dB Max.
Power:	250 Watts CW
Phase Balance:	± 2° Typical
Insertion Loss:	0.25 dB Max.
Isolation:	23 dB Min.
VSWR:	1.20:1 Max. All Ports


HBL *HYBR-LINE* Series Drop-In Hybrid couplers provide High Power dividing or combining while exhibiting excellent phase and amplitude balance over continuous broadband operation. Solid compact designs are able to operate in a wide variety of environments, which include Medical, Industrial, Commercial wireless, Military, and Space. The **P3** library of designs allows for modifications of standard designs to be made quickly and inexpensively to meet specific requirements with short delivery times. Consult factory for special requirements or frequency ranges.

NOTES:

Material: Aluminum Alloy. 6061-T651

Finish: Chem-Film, Clear Irridite MIL-DTL-5541F

Operating Temperature: -55°C to +85°C

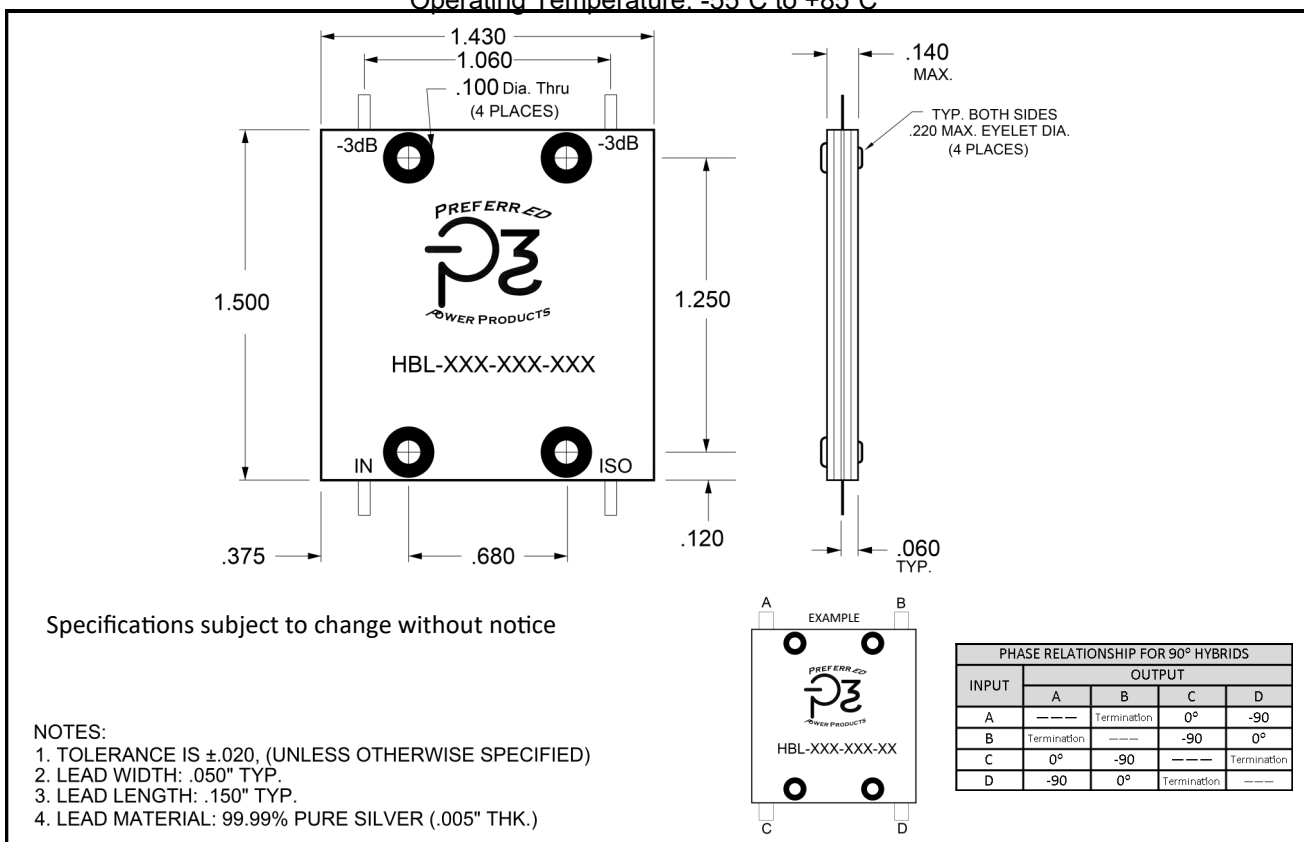

www.preferredpowerproducts.com

Tel: 1-772-291-2549 | sales@preferredpowerproducts.net

STUART, FL 34997