


# 800 Watt Flange RFPower Termination

Data Sheet TD800-50 Rev A



DC - 0.5 GHz.  
**HYBR-FILM™**

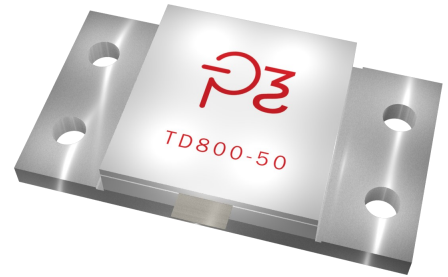



Model: TD800-50




**HYBR-FILM™** flange terminations are the highest performing RF & Microwave power film resistive products on the market today. Designed bolt-down attachment directly to a heat-sink offers high power and higher frequency ratings than other suppliers. Power ratings from 30 - 1000 watts combined with versatile industry standard configurations allow for easy design-in solutions or replacing older outdated marginal devices that may have degraded or drifted over time. Applications include Medical, Broadcast, Industrial, Commercial Wireless, Military and Space. The **P3** library of designs allows for modifications of standard designs to be made quickly and inexpensively to meet specific requirements with short delivery times. Please contact the factory for any special requirements or frequency ranges.

Electrical Performance		Mechanical Specification	
Frequency:	DC - 0.5 GHz.	Resistor:	Hybrid Blended Thick Film
Impedance:	50Ω ±5% (Standard)	Chip Material:	99.6% Beryllium Oxide
Power:	800 Watts Average	Cover:	96% Aluminum Oxide
VSWR:	1.50:1 DC-0.5 GHz.	I/O Tab:	99.99% Silver, .005" Thick
Power Rating:	100% @ +100°C	Ground Plane:	Cu Flange, Nickel Plated
		Operating Temp.:	-55°C to +150°C

Specifications subject to change without notice

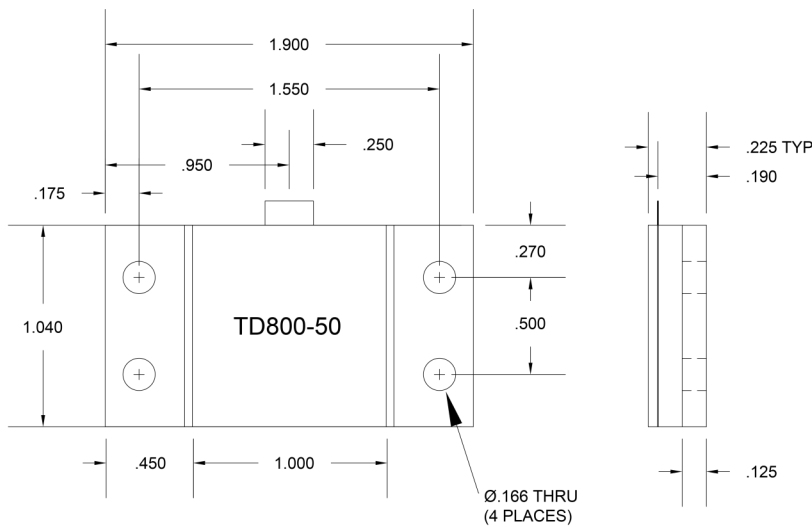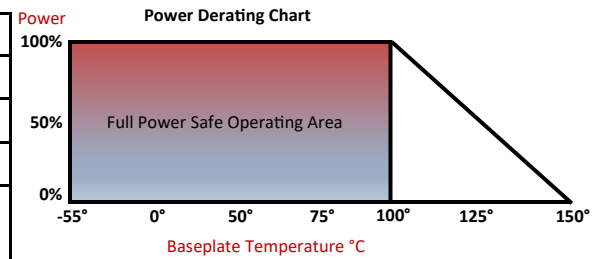

### SUGGESTED MOUNTING AND TAB STRESS RELIEF METHOD

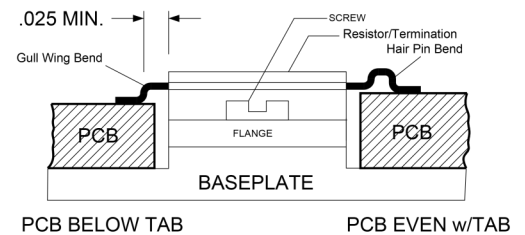

THREAD SIZE	TORQUE SETTING
2-56	4 inch-pounds
4-40	6 inch-pounds
6-32	8 inch-pounds
8-32	12 inch-pounds

[www.preferredpowerproducts.com](http://www.preferredpowerproducts.com)

Tel: 1-772-291-2549 | [sales@preferredpowerproducts.net](mailto:sales@preferredpowerproducts.net)

STUART, FL 34997