
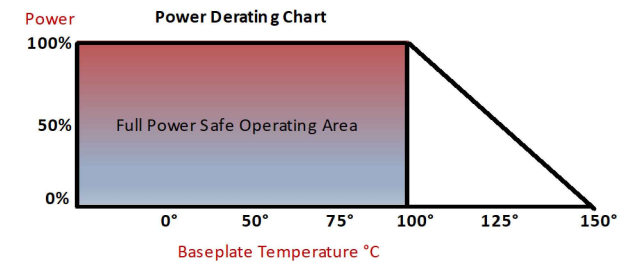


REV	RELEASE	DESCRIPTION	APPR	DATE
A	NEW	INITIAL RELEASE	PD	3/1/17
B	UPDATE	UPDATED TITLE BLOCK	PD	9/5/17

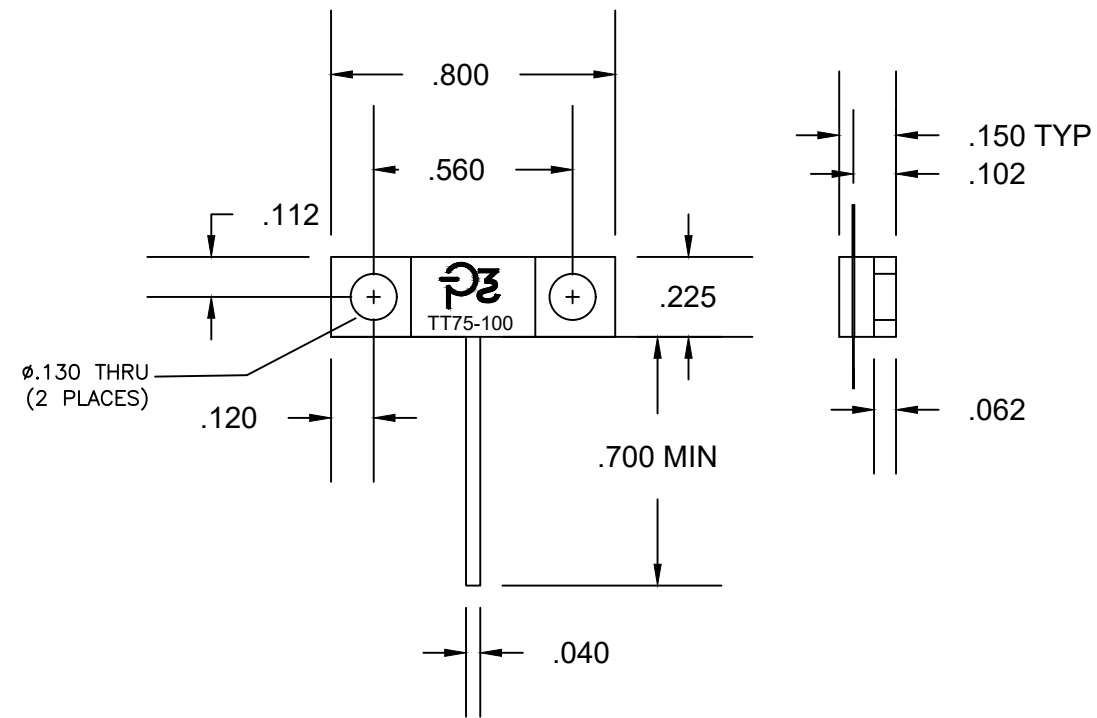


MATERIALS:

FLANGE: COPPER 1/4 HD
 CHIP: BeO
 COVER: ALUMINA CERAMIC
 TAB: SILVER, 99.999% .005" THK.
 RESISTIVE FILM: THICK FILM
 FINISH: Ni per QQ-N-290

ELECTRICAL:

RESISTANCE : 100Ω ±5%
 INPUT POWER: 75 WATTS
 OPERATING TEMP.: -55° TO +150°C

(RA MILLER SCD-276)

 PREFERRED POWER PRODUCTS PALM CITY, FLORIDA 34990	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES TOLERANCES: <table border="1"> <thead> <tr> <th>DECIMALS</th> <th>ANGULAR</th> </tr> </thead> <tbody> <tr> <td>.X ± .1</td> <td>± .5°</td> </tr> <tr> <td>.XX ± .01</td> <td></td> </tr> <tr> <td>.XXX ± .005</td> <td></td> </tr> </tbody> </table>	DECIMALS	ANGULAR	.X ± .1	± .5°	.XX ± .01		.XXX ± .005		PART NO. TT75-100	
	DECIMALS	ANGULAR									
	.X ± .1	± .5°									
.XX ± .01											
.XXX ± .005											
THIS DRAWING AND ALL CONTENTS HEREIN, ARE THE SOLE, PROPRIETARY PROPERTY OF PREFERRED POWER PRODUCTS, LLC AND MAY NOT BE USED, REPRODUCED OR DISCLOSED WITHOUT EXPRESSED WRITTEN CONSENT.	TERMINATION 100 OHM 5% 75 WATT										
CHECKED PD 3/1/17 DRAWN PD 3/1/17 CAGE CODE 7W5T7	APPROVED PD 3/1/17 ENGINEER PD 3/1/17 SCALE 1:1	SHEET 1 OF 1									