


REV	RELEASE	DESCRIPTION	APPR	DATE
A	NEW	INITIAL RELEASE	PD	9/24/19

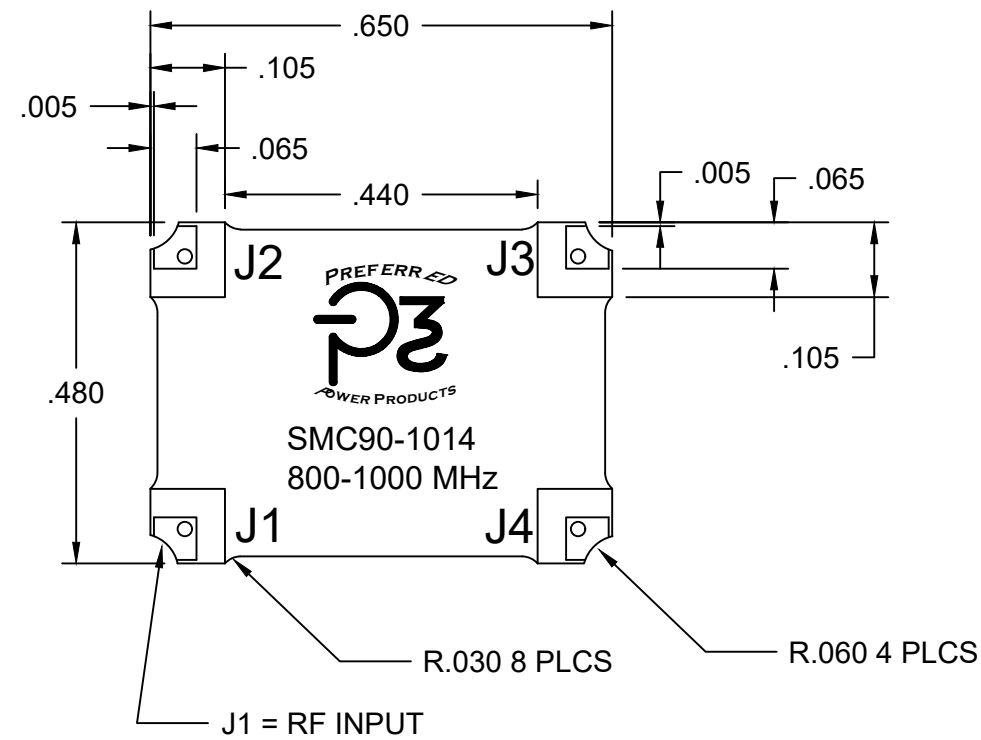

SPECIFICATIONS:

Frequency: 800-1000 MHz.
 Power: 225 Watts CW
 Insertion Loss: 0.20 dB Max.
 Isolation: 20 dB Min.
 Phase Bal.: 90° ±5.0° Max.
 VSWR: 1.25 Max.
 Amplitude Bal.: ±0.30 dB Max.
 Oper. Temp.: -55° to +85°C

MECHANICAL:

Board Material: PTFE
 Finish: Emmersion Tin Plate

PORT CONFIGURATION

PORTS	J1	J2	J3	J4
J1	--	0°	-90°	ISO
J2	0°	--	ISO	-90°
J3	-90°	ISO	--	0°
J4	ISO	-90°	0°	--



<p>PREFERRED POWER PRODUCTS PALM CITY, FLORIDA 34990</p>	<p>UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES</p> <p>TOLERANCES:</p> <table border="1"> <thead> <tr> <th>DECIMALS</th> <th>ANGULAR</th> </tr> </thead> <tbody> <tr> <td>.X ± .1</td> <td>± .5°</td> </tr> <tr> <td>.XX ± .01</td> <td></td> </tr> <tr> <td>.XXX ± .005</td> <td></td> </tr> </tbody> </table>	DECIMALS	ANGULAR	.X ± .1	± .5°	.XX ± .01		.XXX ± .005		<p>PART NO. SMC90-1014</p> <p>HYBRID COUPLER, SMT 90 DEGREE 800-1000 MHz. 225 WATT</p>	
	DECIMALS	ANGULAR									
.X ± .1	± .5°										
.XX ± .01											
.XXX ± .005											
<p>THIS DRAWING AND ALL CONTENTS HEREIN, ARE THE SOLE, PROPRIETARY PROPERTY OF PREFERRED POWER PRODUCTS, LLC AND MAY NOT BE USED, REPRODUCED OR DISCLOSED WITHOUT EXPRESSED WRITTEN CONSENT.</p>	<p>CHECKED PD 9/24/19</p> <p>DRAWN PD 9/24/19</p> <p>CAGE CODE 7W5T7</p>	<p>APPROVED PD 9/24/19</p> <p>ENGINEER PD 9/24/19</p> <p>SCALE 1:1</p>	<p>SHEET 1 OF 1</p>								