


REV	RELEASE	DESCRIPTION	APPR	DATE
-	-	-	-	-

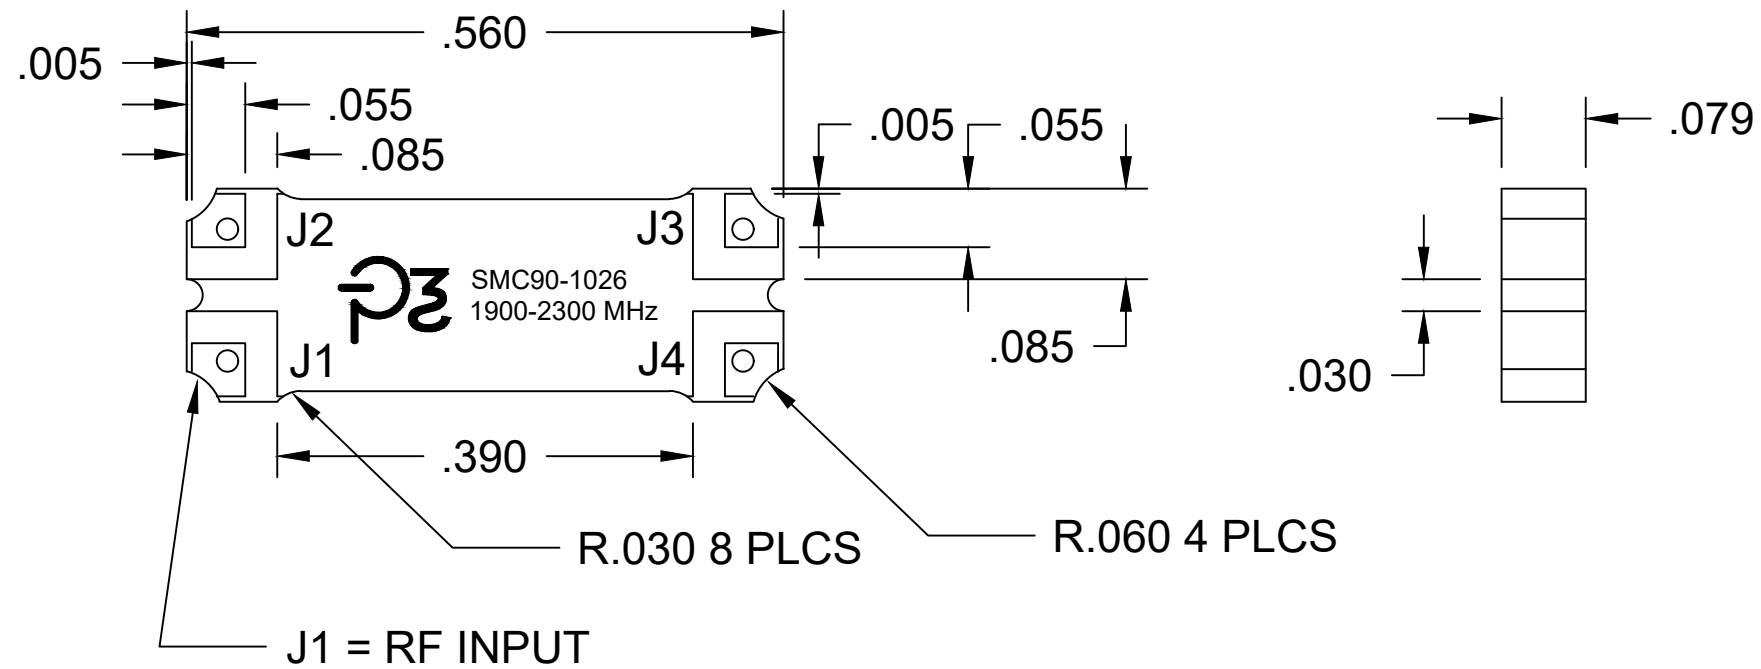

**SPECIFICATIONS:**

Frequency: 1900-2300 MHz.  
 Power: 100 Watts CW  
 Insertion Loss: 0.11 dB Max.  
 Isolation: 25 dB Min.  
 Phase Bal.: 90° ±2.0° Max.  
 VSWR: 1.12 Max.  
 Amplitude Bal.: ±0.30 dB Max.  
 Oper. Temp.: -55° to +85°C

**MECHANICAL:**

Board Material: PTFE  
 Finish: Emmersion Tin Plate

**PORT CONFIGURATION**

PORTS	J1	J2	J3	J4
J1	--	0°	-90°	ISO
J2	0°	--	ISO	-90°
J3	-90°	ISO	--	0°
J4	ISO	-90°	0°	--



**PREFERRED  
 POWER PRODUCTS**  
 PALM CITY, FLORIDA 34990

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE IN INCHES

**TOLERANCES:**

DECIMALS	ANGULAR
.X ± .1	± .5°
.XX ± .01	
.XXX ± .005	

THIS DRAWING AND ALL CONTENTS  
 HEREIN, ARE THE SOLE, PROPRIETARY  
 PROPERTY OF PREFERRED POWER  
 PRODUCTS, LLC AND MAY NOT BE USED,  
 REPRODUCED OR DISCLOSED WITHOUT  
 EXPRESSED WRITTEN CONSENT.

PART NO. <b>SMC90-1026</b>			
<b>HYBRID COUPLER, SMC 90 DEG.    1900-2300 MHz.    100 WATT</b>			
CHECKED	PD	9/25/19	APPROVED PD 9/25/19
DRAWN	PD	9/25/19	ENGINEER PD 9/25/19
CAGE CODE	7W5T7	SCALE 1:1	SHEET 1 OF 1