


REV	RELEASE	DESCRIPTION	APPR	DATE
-	-	-	-	-

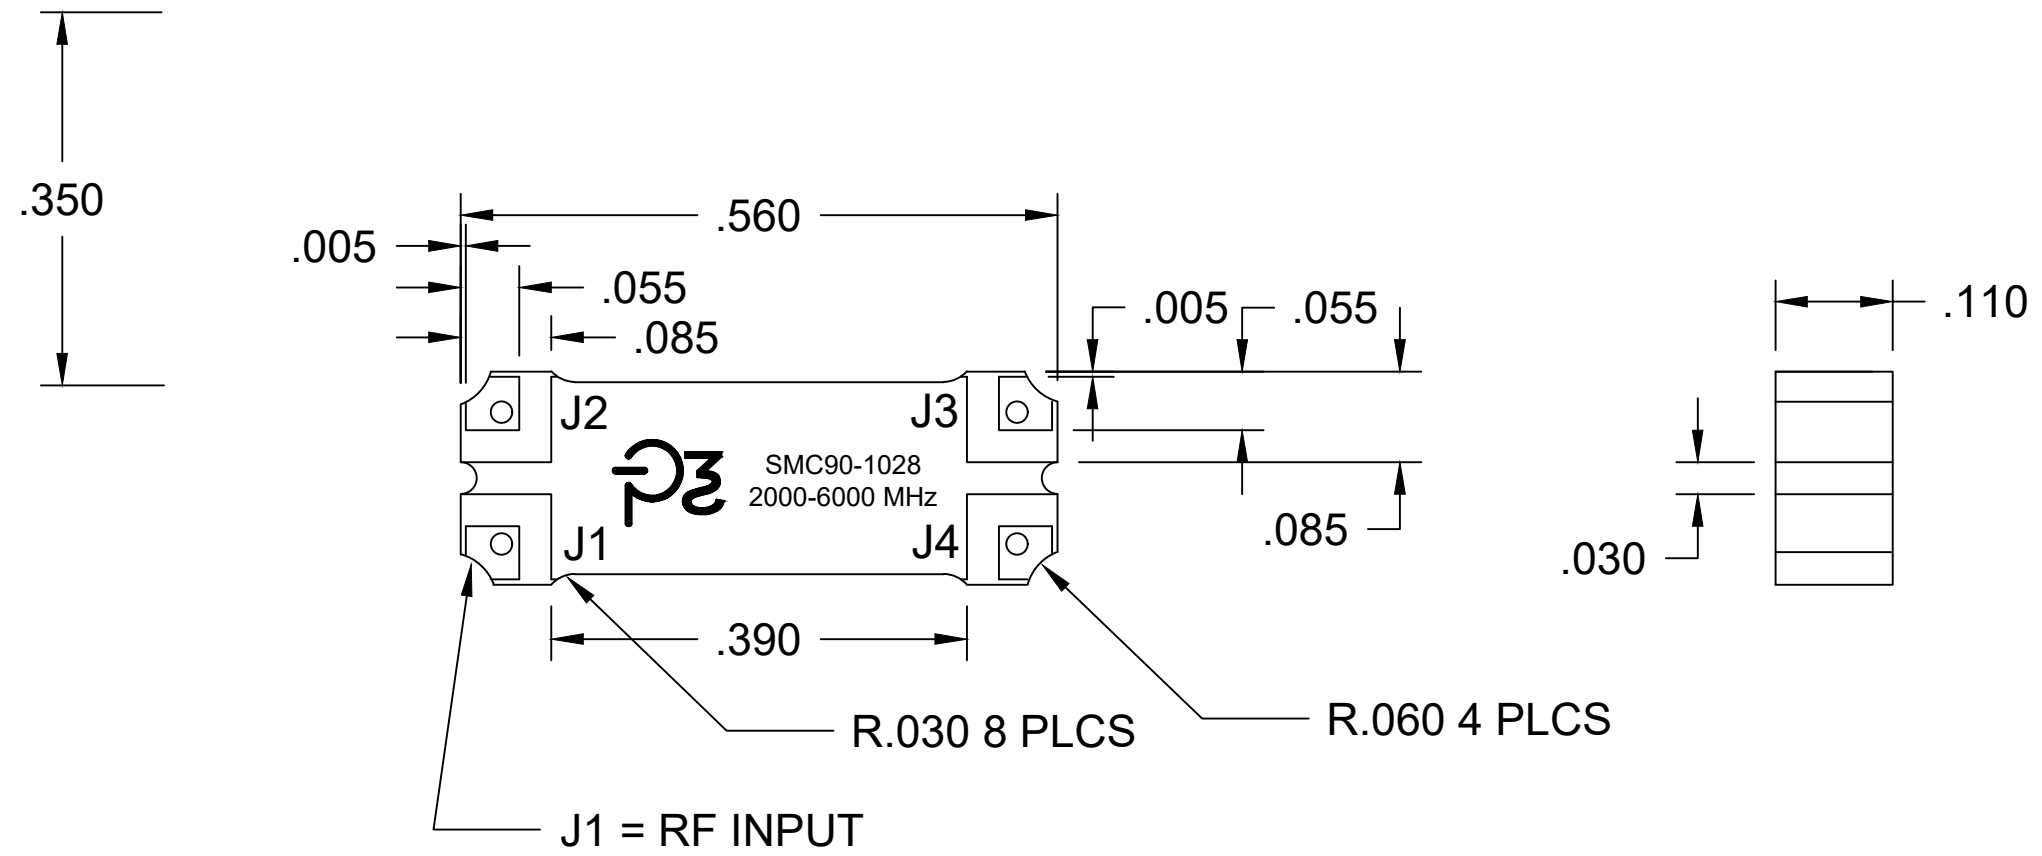

**SPECIFICATIONS:**

Frequency: 2000-6000 MHz.  
 Power: 100 Watts CW  
 Insertion Loss: 0.27 dB Max.  
 Isolation: 18 dB Min.  
 Phase Bal.: 90° ±5.0° Max.  
 VSWR: 1.30 Max.  
 Amplitude Bal.: ±1.00 dB Max.  
 Oper. Temp.: -55° to +85°C

**MECHANICAL:**

Board Material: PTFE  
 Finish: Emmersion Tin Plate

**PORT CONFIGURATION**

PORTS	J1	J2	J3	J4
J1	--	0°	-90°	ISO
J2	0°	--	ISO	-90°
J3	-90°	ISO	--	0°
J4	ISO	-90°	0°	--



**PREFERRED  
 POWER PRODUCTS**  
 PALM CITY, FLORIDA 34990

UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE IN INCHES

**TOLERANCES:**

DECIMALS	ANGULAR
.X ± .1	± .5°
.XX ± .01	
.XXX ± .005	

THIS DRAWING AND ALL CONTENTS HEREIN, ARE THE SOLE, PROPRIETARY PROPERTY OF PREFERRED POWER PRODUCTS, LLC AND MAY NOT BE USED, REPRODUCED OR DISCLOSED WITHOUT EXPRESSED WRITTEN CONSENT.

PART NO.		<b>SMC90-1028</b>	
		HYBRID COUPLER, SMC 90 DEG. 2000-6000 MHz. 100 WATT	
CHECKED	PD 9/25/19	APPROVED	PD 9/25/19
DRAWN	PD 9/25/19	ENGINEER	PD 9/25/19
CAGE CODE	7W5T7	SCALE	1:1
		SHEET 1 OF 1	