



REV	RELEASE	DESCRIPTION	APPR	DATE
-	NEW	PRELIMINARY	PD	2/4/20

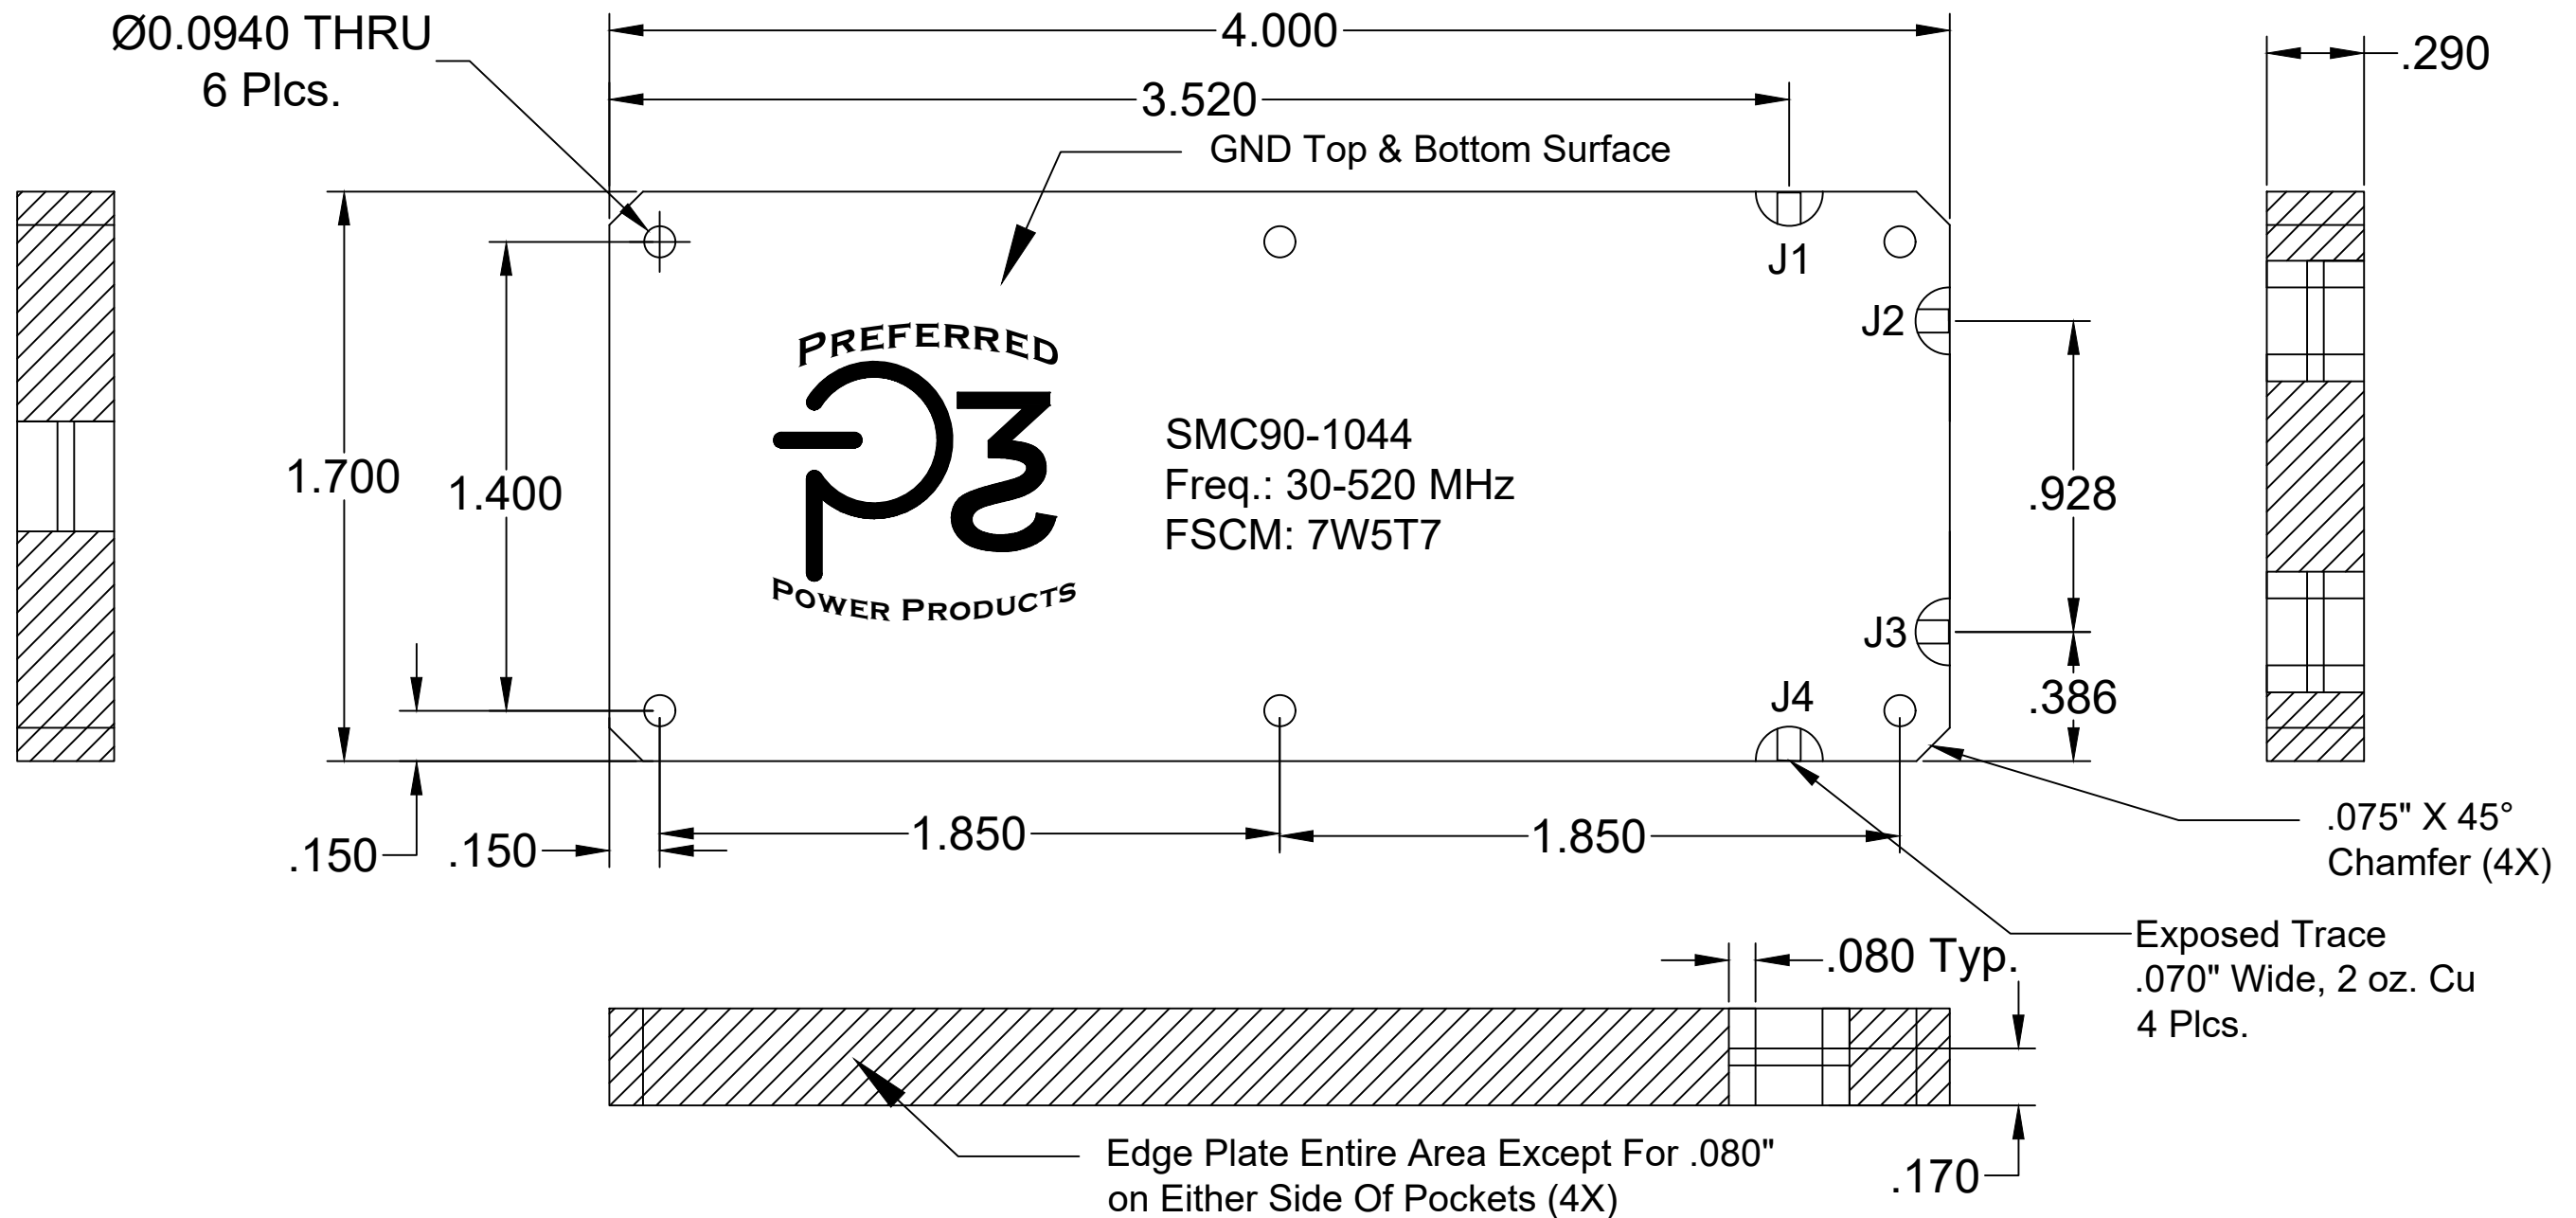

- 1). Top & Bottom Layer Material: Rogers 5880, .120" Thick
- 2). Center Core Material: Rogers 5880, .050; Thick, 2 oz. Cu, Both Sides
- 3). Finish: Immersion Tin

PRELIMINARY

 PREFERRED POWER PRODUCTS PALM CITY, FLORIDA 34990	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES TOLERANCES: <table border="1"> <thead> <tr> <th>DECIMALS</th> <th>ANGULAR</th> </tr> </thead> <tbody> <tr> <td>.X ± .1</td> <td>± .5°</td> </tr> <tr> <td>.XX ± .01</td> <td></td> </tr> <tr> <td>.XXX ± .005</td> <td></td> </tr> </tbody> </table>		DECIMALS	ANGULAR	.X ± .1	± .5°	.XX ± .01		.XXX ± .005		PART NO. SMC90-1044 HYBRID COUPLER 30-520 MHz. 400 WATT	
	DECIMALS	ANGULAR										
.X ± .1	± .5°											
.XX ± .01												
.XXX ± .005												
THIS DRAWING AND ALL CONTENTS HEREIN, ARE THE SOLE, PROPRIETARY PROPERTY OF PREFERRED POWER PRODUCTS, LLC AND MAY NOT BE USED, REPRODUCED OR DISCLOSED WITHOUT EXPRESSED WRITTEN CONSENT.	CHECKED PD 2/4/20 DRAWN PD 2/4/20 CAGE CODE 7W5T7	APPROVED PD 2/3/20 ENGINEER PD 2/4/20 SCALE 1:1	SHEET 1 OF 1									