
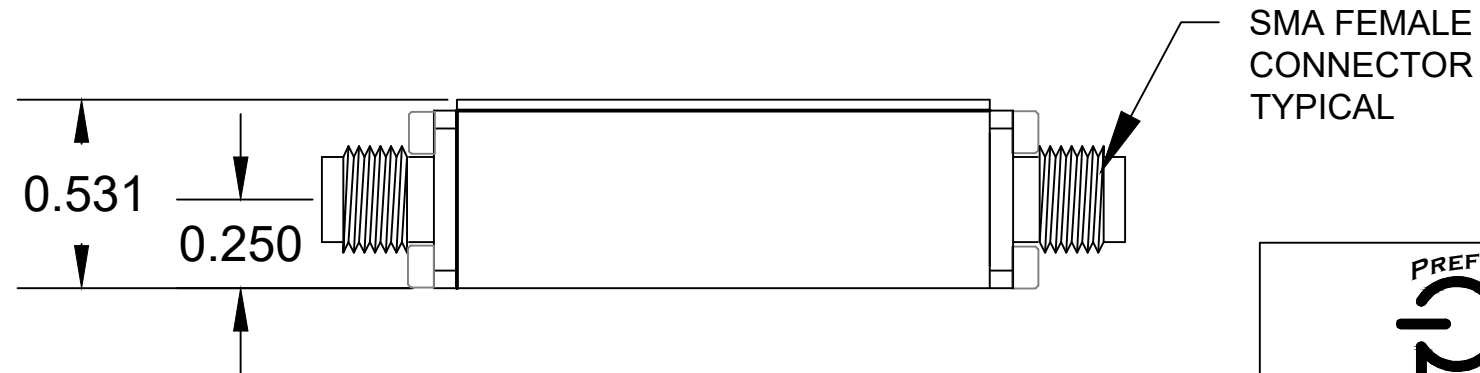


REV	RELEASE	DESCRIPTION	APPR	DATE
A	NEW	INITIAL RELEASE	PD	4/21/16

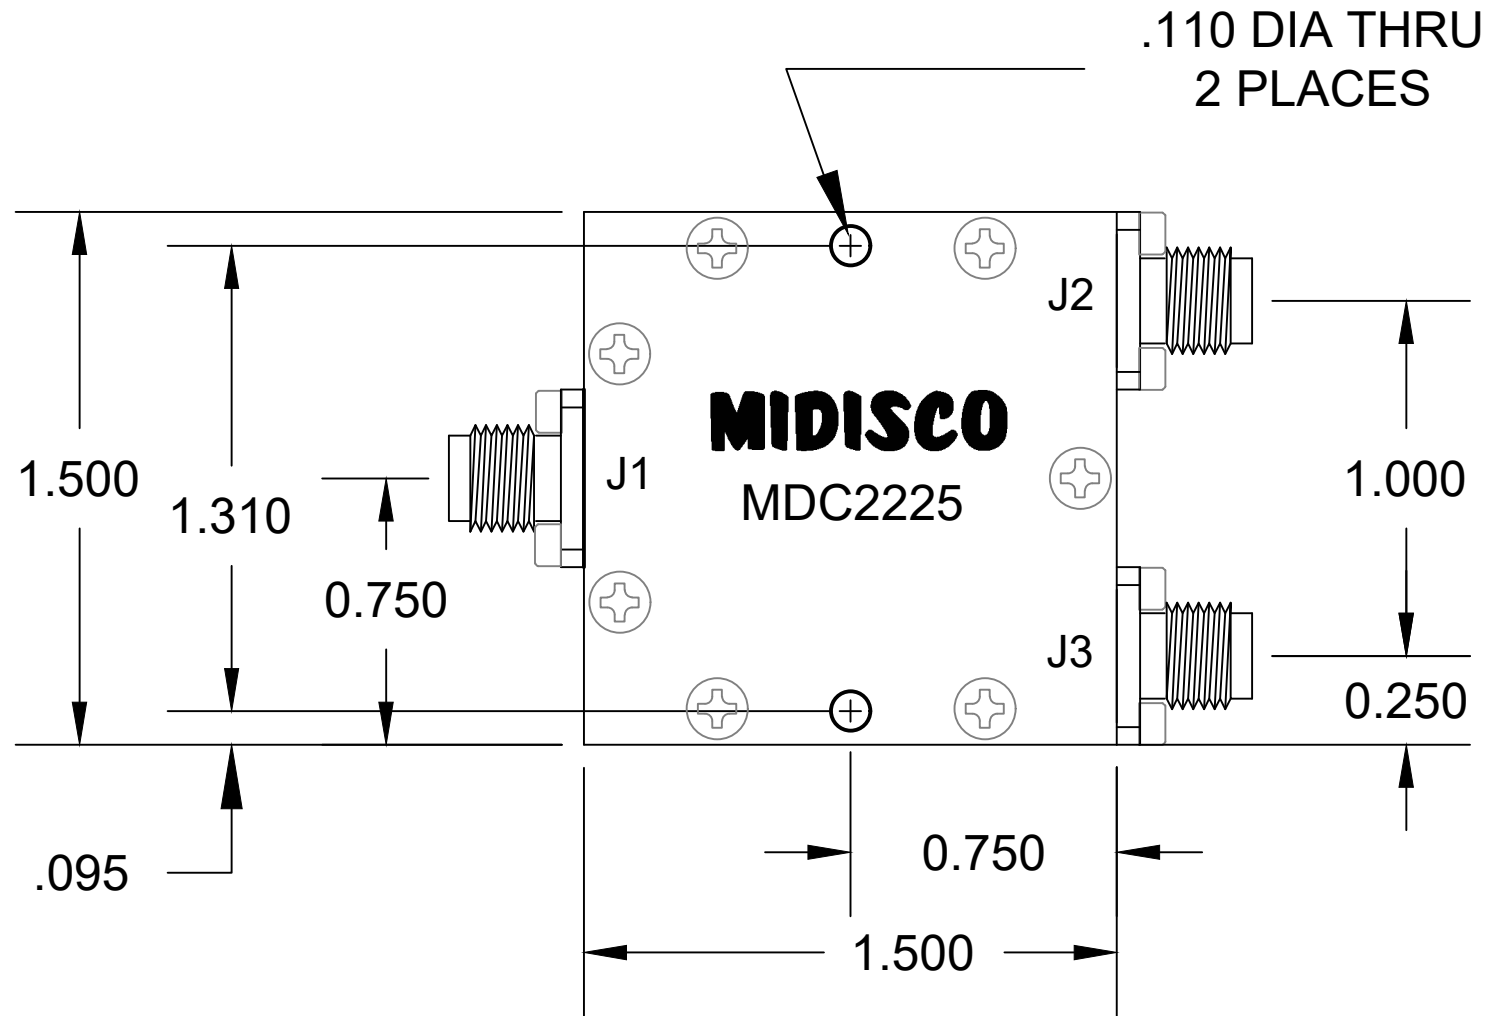

ELECTRICAL SPECIFICATIONS:

FREQUENCY: 2-4 GHz
POWER: 30 WATTS
ISOLATION: 20 dB TYP.
INSERTION LOSS: 0.3 dB
VSWR: 1:3:1
PHASE BALANCE: 4.0 deg. MAX
AMPLITUDE BALANCE: 0.2dB
COUPLING: 3 dB
Finish: POWDER COAT

(MIDISCO P/N: MDC2225)



**PREFERRED
 POWER PRODUCTS**
 BOCA RATON, FLORIDA 33434

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE IN INCHES

TOLERANCES:

DECIMALS	ANGULAR
.X ± .1	± .5°
.XX ± .01	
.XXX ± .005	

THIS DRAWING AND ALL CONTENTS
HEREIN, ARE THE SOLE, PROPRIETARY
PROPERTY OF MICROWAVE
DISTRIBUTORS AND MAY NOT BE USED,
REPRODUCED OR DISCLOSED WITHOUT
EXPRESSED WRITTEN CONSENT.

PART NO. PNW2-2000-4000-S30			
POWER DIVIDER/COMBINER			
2000 - 4000 MHz.			
30 WATT			
CHECKED	PD	4/21/16	APPROVED PD 4/21/16
DRAWN	PD	4/21/16	ENGINEER PD 4/21/16
CAGE CODE	52335	SCALE	2:1
		SHEET	1 OF 1